

Big or small, Renfroe has it all.

Whether it's big, small or somewhere in between, if your operation depends on using the right size lifting clamp for the job, you need a Renfroe clamp. That's because J.C. Renfroe has an extensive selection of products with many rated lifting capacities. We're so determined that you find the right model for your lifting needs that, if you can't find it from our line of clamps, we'll happily engineer one specially suited

to your application. We even offer free safety surveys and training seminars for our customers. That's what comes from being tuned into our customers' needs and wants for more than 65 years. It's no wonder that outstanding customer service and on-time deliveries rank right up there with our being able to offer you the best quality lifting clamp in the industry.

For more information on how we size up, contact us today for an on-the-spot consultation about your lifting needs.



J.C. RENFROE & SONS

Giving Industry the Lift It Needs!

Jacksonville, FL USA
Fax 904-354-7865 • Toll-Free 800-874-8454

www.jcrenfroe.com

VERTICAL + 180




Model DC

Locking Type

Model DC is vertical lifting, locking and 180° turning clamp. The DC's unique design, utilizing two movable gripping cams, allows this clamp to lift any load within its plate size range from 0 up to 6 ton with a 300 Brinell hardness or less.



MODEL DC EXPLODED VIEW

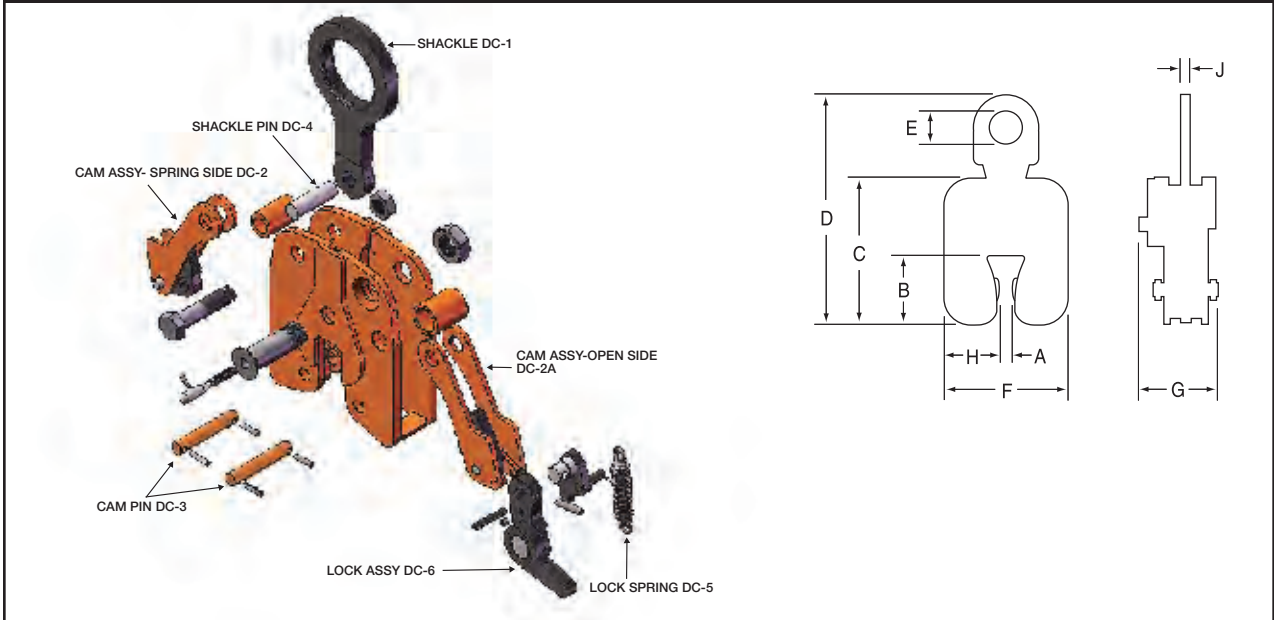

SPECIFICATIONS (in inches)

Model	Rated Capacity Tons	Plate Thickness A	B	MAX. C	D	E	F	G	H	J	Weight (in pounds)
DC-A	1/2	0 - 5/8	2 5/16	5	7 7/8	1 1/8	4 3/8	2 5/8	1 7/8	5/16	6
DC-B	1/2	0 - 3/4	2 9/16	6 5/16	9 1/4	1 1/8	5 1/2	2 3/4	2 3/8	5/16	9
DC-C	1/2	3/4 - 1 1/2	2 9/16	6 3/8	9 1/2	1 1/8	6 1/4	2 3/4	2 3/8	5/16	10
DC	1	0 - 1 1/8	3 3/8	7 5/16	12 1/8	2 5/8	6 3/8	3 3/4	2 5/8	5/16	15
DC	3	0 - 3/4	4 3/4	9 1/4	17 1/4	3 5/8	8	4 3/8	3 5/8	3/4	30
DC	6	0 - 1	5 7/8	11 1/2	19	3 1/2	10 1/2	4 3/4	4 3/4	1 1/2	54
DC	6	1 1/2 - 3	5 7/8	11 5/8	19	3 1/2	10 7/8	4 3/4	4	1 1/2	51
DC	6	2 - 3	5 7/8	11 5/8	19	3 1/2	10 7/8	4 3/4	4	1 1/2	51

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.




Model JA

Locking Type

The **Model JA** is a vertical lifting clamp capable of turning a single plate or member from horizontal to vertical to horizontal through a 180 degree arc. It incorporates a push button auxiliary lock.

MODEL JA EXPLODED VIEW

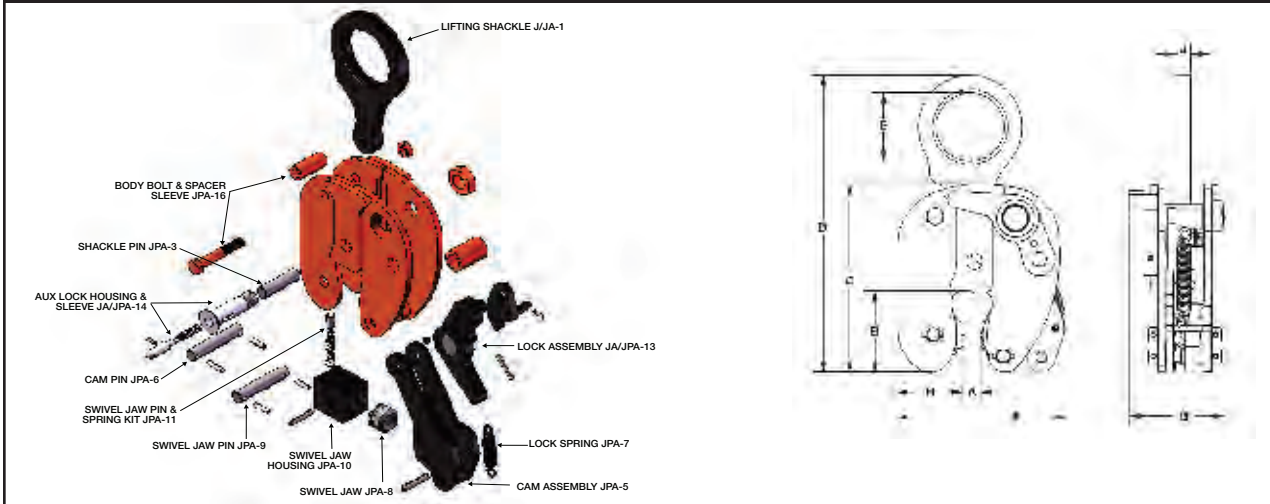

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness A	B	C	MAX. D	E	MAX. F	G	H	J	Weight (in pounds)
1/2	0- $\frac{5}{8}$	$2\frac{3}{4}$	$6\frac{1}{2}$	12	$2\frac{5}{8}$	$5\frac{5}{8}$	$3\frac{3}{4}$	$2\frac{1}{4}$	$\frac{1}{2}$	10
	$\frac{1}{2}$ -1	$2\frac{3}{4}$	$6\frac{1}{2}$	12	$2\frac{5}{8}$	6	$3\frac{3}{4}$	$2\frac{1}{4}$	$\frac{1}{2}$	
	$\frac{3}{4}$ -1 $\frac{1}{4}$	$2\frac{3}{4}$	$6\frac{1}{2}$	12	$2\frac{5}{8}$	$6\frac{1}{4}$	$3\frac{3}{4}$	$2\frac{1}{4}$	$\frac{1}{2}$	
	$1\frac{1}{4}$ -1 $\frac{3}{4}$	$2\frac{3}{4}$	$6\frac{1}{2}$	12	$2\frac{5}{8}$	$6\frac{3}{4}$	$3\frac{3}{4}$	$2\frac{1}{4}$	$\frac{1}{2}$	
1	0- $\frac{3}{4}$	$3\frac{3}{8}$	$7\frac{3}{4}$	$13\frac{3}{4}$	$2\frac{5}{8}$	7	$3\frac{1}{2}$	$2\frac{5}{8}$	$\frac{5}{8}$	15
	$\frac{1}{2}$ -1	$3\frac{3}{8}$	$7\frac{3}{4}$	$13\frac{3}{4}$	$2\frac{5}{8}$	$7\frac{1}{4}$	$3\frac{1}{2}$	$2\frac{5}{8}$	$\frac{5}{8}$	
	$\frac{3}{4}$ -1 $\frac{1}{4}$	$3\frac{3}{8}$	$7\frac{3}{4}$	$13\frac{3}{4}$	$2\frac{5}{8}$	8	$3\frac{1}{2}$	$2\frac{5}{8}$	$\frac{5}{8}$	
	1-1 $\frac{1}{2}$	$3\frac{3}{8}$	$7\frac{3}{4}$	$13\frac{3}{4}$	$2\frac{5}{8}$	$8\frac{1}{4}$	$3\frac{1}{2}$	$2\frac{5}{8}$	$\frac{5}{8}$	
2	$1\frac{1}{2}$ -2	$3\frac{3}{8}$	$7\frac{3}{4}$	$13\frac{3}{4}$	$2\frac{5}{8}$	$8\frac{3}{4}$	$3\frac{1}{2}$	$2\frac{5}{8}$	$\frac{5}{8}$	36
	0-1	$3\frac{3}{8}$	$9\frac{1}{2}$	$17\frac{3}{8}$	$3\frac{1}{2}$	$8\frac{3}{4}$	$4\frac{1}{2}$	3	$\frac{3}{4}$	
	$\frac{3}{4}$ -1 $\frac{1}{2}$	$3\frac{3}{8}$	$9\frac{1}{2}$	$17\frac{3}{8}$	$3\frac{1}{2}$	$9\frac{1}{4}$	$4\frac{1}{2}$	3	$\frac{3}{4}$	
	1 $\frac{1}{4}$ -2	$3\frac{3}{8}$	$9\frac{1}{2}$	$17\frac{3}{8}$	$3\frac{1}{2}$	$9\frac{3}{4}$	$4\frac{1}{2}$	3	$\frac{3}{4}$	
4	2-2 $\frac{1}{4}$	$3\frac{3}{8}$	$9\frac{1}{2}$	$17\frac{3}{8}$	$3\frac{1}{2}$	$10\frac{1}{2}$	$4\frac{1}{2}$	3	$\frac{3}{4}$	42
	$\frac{3}{8}$ -1 $\frac{1}{4}$	4 $\frac{3}{8}$	$11\frac{1}{2}$	$20\frac{1}{2}$	$3\frac{1}{2}$	$9\frac{3}{4}$	$4\frac{1}{2}$	$3\frac{3}{4}$	$1\frac{1}{2}$	
	1-2	4 $\frac{3}{8}$	$11\frac{1}{2}$	$20\frac{1}{2}$	$3\frac{1}{2}$	10	$4\frac{1}{2}$	$3\frac{3}{4}$	$1\frac{1}{2}$	
	2-3	4 $\frac{3}{8}$	$11\frac{1}{2}$	$20\frac{1}{2}$	$3\frac{1}{2}$	11	$4\frac{1}{2}$	$3\frac{3}{4}$	$1\frac{1}{2}$	
6	3-4	4 $\frac{3}{8}$	$11\frac{1}{2}$	$20\frac{1}{2}$	$3\frac{1}{2}$	12	$4\frac{1}{2}$	$3\frac{3}{4}$	$1\frac{1}{2}$	64
	$\frac{1}{4}$ -1 $\frac{3}{8}$	4 $\frac{3}{8}$	$12\frac{3}{4}$	$20\frac{7}{8}$	$3\frac{1}{2}$	$10\frac{3}{4}$	4 $\frac{3}{4}$	$3\frac{3}{4}$	$1\frac{1}{2}$	
	1-2 $\frac{1}{8}$	4 $\frac{3}{8}$	$12\frac{3}{4}$	$20\frac{7}{8}$	$3\frac{1}{2}$	$11\frac{1}{2}$	4 $\frac{3}{4}$	$3\frac{3}{4}$	$1\frac{1}{2}$	
	2-3 $\frac{1}{8}$	4 $\frac{3}{8}$	$12\frac{3}{4}$	$20\frac{7}{8}$	$3\frac{1}{2}$	$12\frac{1}{2}$	4 $\frac{3}{4}$	$3\frac{3}{4}$	$1\frac{1}{2}$	
8	3-4 $\frac{1}{8}$	4 $\frac{3}{8}$	$12\frac{3}{4}$	$20\frac{7}{8}$	$3\frac{1}{2}$	$13\frac{1}{2}$	4 $\frac{3}{4}$	$3\frac{3}{4}$	$1\frac{1}{2}$	83
	$\frac{3}{8}$ -1 $\frac{1}{2}$	$5\frac{3}{8}$	$12\frac{3}{4}$	$22\frac{3}{8}$	$3\frac{3}{4}$	$12\frac{3}{8}$	$5\frac{1}{4}$	$4\frac{1}{4}$	2	
	1-2 $\frac{1}{8}$	$5\frac{3}{8}$	$12\frac{3}{4}$	$22\frac{3}{8}$	$3\frac{3}{4}$	13	$5\frac{1}{4}$	$4\frac{1}{4}$	2	
	2-3 $\frac{1}{8}$	$5\frac{3}{8}$	$12\frac{3}{4}$	$22\frac{3}{8}$	$3\frac{3}{4}$	$14\frac{3}{8}$	$5\frac{1}{4}$	$4\frac{1}{4}$	2	
12	3-4 $\frac{1}{8}$	$5\frac{3}{8}$	$12\frac{3}{4}$	$22\frac{3}{8}$	$3\frac{3}{4}$	$15\frac{3}{8}$	$5\frac{1}{4}$	$4\frac{1}{4}$	2	203
	$\frac{1}{2}$ -2 $\frac{1}{2}$	$7\frac{1}{4}$	$17\frac{3}{4}$	$28\frac{1}{8}$	$3\frac{7}{8}$	$15\frac{15}{16}$	$7\frac{1}{16}$	$5\frac{5}{8}$	2	
	2-4	$7\frac{1}{4}$	$17\frac{3}{4}$	$28\frac{1}{8}$	$3\frac{7}{8}$	$17\frac{1}{16}$	$7\frac{1}{16}$	$5\frac{5}{8}$	2	
16	4-6	$7\frac{1}{4}$	$17\frac{3}{4}$	$28\frac{1}{8}$	$3\frac{7}{8}$	$19\frac{7}{16}$	$7\frac{1}{16}$	$5\frac{5}{8}$	2	212
	$\frac{1}{2}$ -2 $\frac{1}{2}$	8	$19\frac{13}{16}$	$32\frac{5}{16}$	4 $\frac{1}{2}$	$19\frac{13}{16}$	$8\frac{11}{16}$	6 $\frac{1}{4}$	$2\frac{1}{4}$	
20	$\frac{1}{2}$ -3	$8\frac{5}{8}$	$21\frac{13}{16}$	$35\frac{7}{8}$	5	21	$11\frac{1}{2}$	$6\frac{3}{8}$	$2\frac{3}{4}$	350
	$\frac{1}{2}$ -2 $\frac{1}{2}$	8 $\frac{5}{8}$	$23\frac{3}{8}$	$35\frac{7}{8}$	5	$19\frac{1}{16}$	9 $\frac{5}{8}$	6 $\frac{3}{4}$	3	483
25	3-5	8 $\frac{5}{8}$	$23\frac{3}{8}$	$35\frac{7}{8}$	5	$21\frac{9}{16}$	9 $\frac{5}{8}$	6 $\frac{3}{4}$	3	495
	4-6	8 $\frac{5}{8}$	$23\frac{3}{8}$	$35\frac{7}{8}$	5	$22\frac{9}{16}$	9 $\frac{5}{8}$	6 $\frac{3}{4}$	3	502
30	$\frac{1}{2}$ -3	$9\frac{9}{16}$	$24\frac{1}{4}$	$39\frac{7}{8}$	5	$22\frac{13}{16}$	$14\frac{9}{16}$	$7\frac{5}{8}$	3	625
50	3-5	$10\frac{7}{8}$	$30\frac{7}{8}$	$46\frac{7}{16}$	5	$29\frac{9}{16}$	$11\frac{1}{8}$	9 $\frac{1}{4}$	$3\frac{1}{2}$	1306


Consult factory for possible larger capacities. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Model LA

Model LA is an ergonomic vertical lifting clamp capable of turning a single plate or member from horizontal to vertical to horizontal through a 180 degree arc. It incorporates a push button auxiliary lock. The “Lock Open – Lock Closed” feature facilitates attaching and removing the clamp from the plate.



MODEL LA EXPLODED VIEW

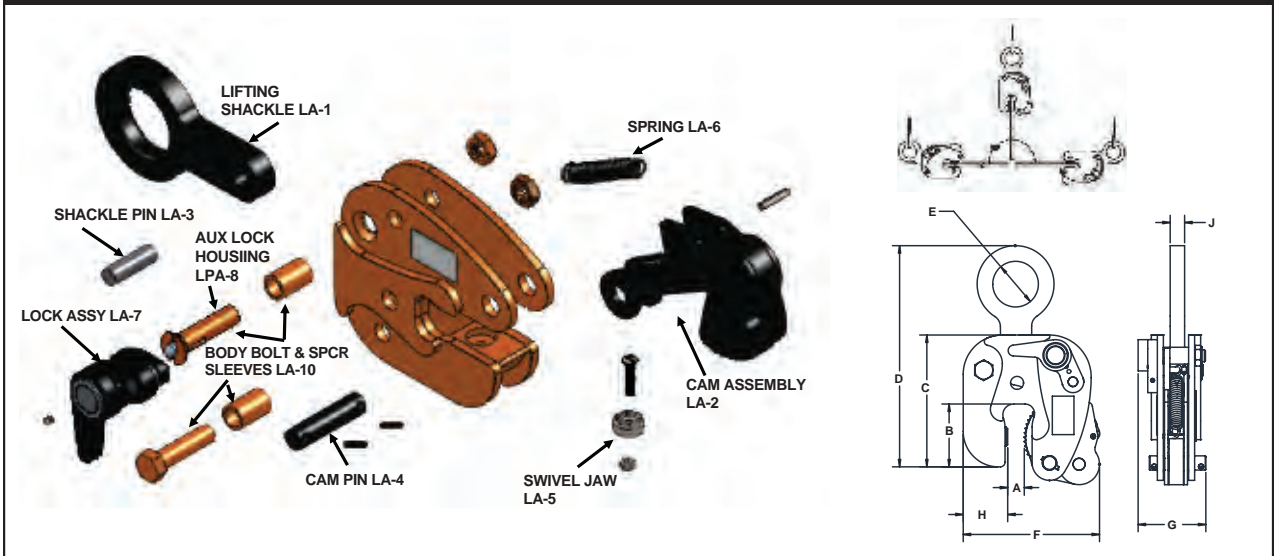

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness A	B	C	MAX. D	E	MAX. F	G	H	J	Weight (in pounds)
1/2	0-5/8	2	4 7/8	8	1 1/8	4 1/4	2 7/16	1 3/8	3/8	4 1/8
1	0-3/4	2	4 7/8	8	1 1/8	4 3/8	2 7/16	1 3/8	1/2	5 1/8
2	0-1	3 5/16	6 7/8	12 1/2	2 3/8	7 1/16	3 5/8	2 3/8	3/4	16 7/8
3	0-1	3 7/16	10	17	3 3/8	8 1/2	3 13/16	2 3/4	3/4	32

Consult factory for possible larger capacities. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE




Model PCK-SL

Locking, Screw Type



The PCK Locking Screw Clamp is a versatile multipurpose lifting turning pulling clamp capable of lift and turn operations from the horizontal through 180 degrees arc. The clamp can also be used for the assembling of steel plates, structural members and welded sections. The clamp is generally used in pairs for the purpose of drawing two plates or members together or to a predetermined position adjacent to each other. The adjusting screw is used to accommodate various thicknesses of material and to facilitate the attachment of the clamp to the member being worked on.

MODEL PCK EXPLODED VIEW

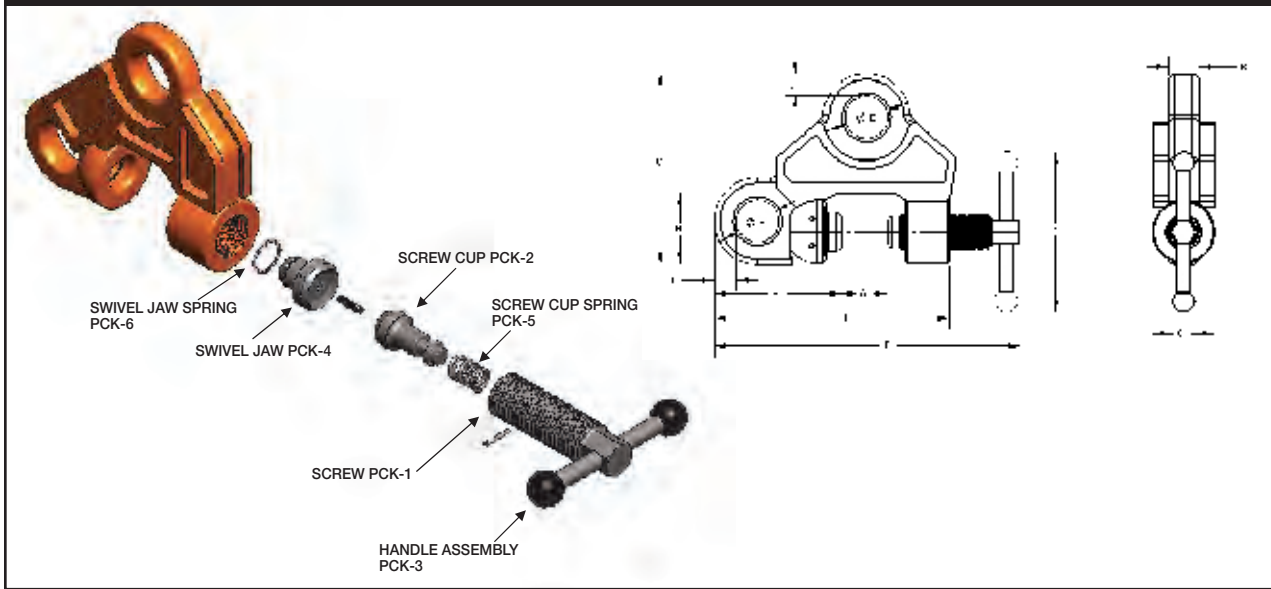

SPECIFICATIONS (in inches)

Capacity Tons	Plate Thickness A	B	C	D	E	F	G	H	Weight			(in kg)
									J	K	L	
0.5	0-1	2½	5½	5 ¹¹ / ₁₆	1	9½	1¾	3	1/2	5 ⁵ / ₁₆	6½	4.64
1	0-1½	3	6¾	5 ¹¹ / ₁₆	1¾	10½	2½	4 ¹ / ₂	1 ¹¹ / ₁₆	¾	7 ⁵ / ₈	9.6
2	0-1½	3 ³ / ₁₆	7½	7	1½	11½	2 ³ / ₈	4 ⁹ / ₁₆	¾	1	8½	14.5
3	¾-1¾	3½	8	6 ¹¹ / ₁₆	1¾	12½	2 ⁵ / ₈	5 ³ / ₈	7 ⁷ / ₈	1½	9½	17.94
5	0-1½	3 ¹³ / ₁₆	9 ⁵ / ₁₆	7 ³ / ₈	2	13 ³ / ₈	2 ⁷ / ₈	5 ⁷ / ₈	1	1 ³ / ₈	10	28.42

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Model RSC

Locking Type

The **Model RSC** is a lightweight screw clamp for bench work on steel plates of large thickness, and weighing less than 1000 lbs.



MODEL RSC EXPLODED VIEW

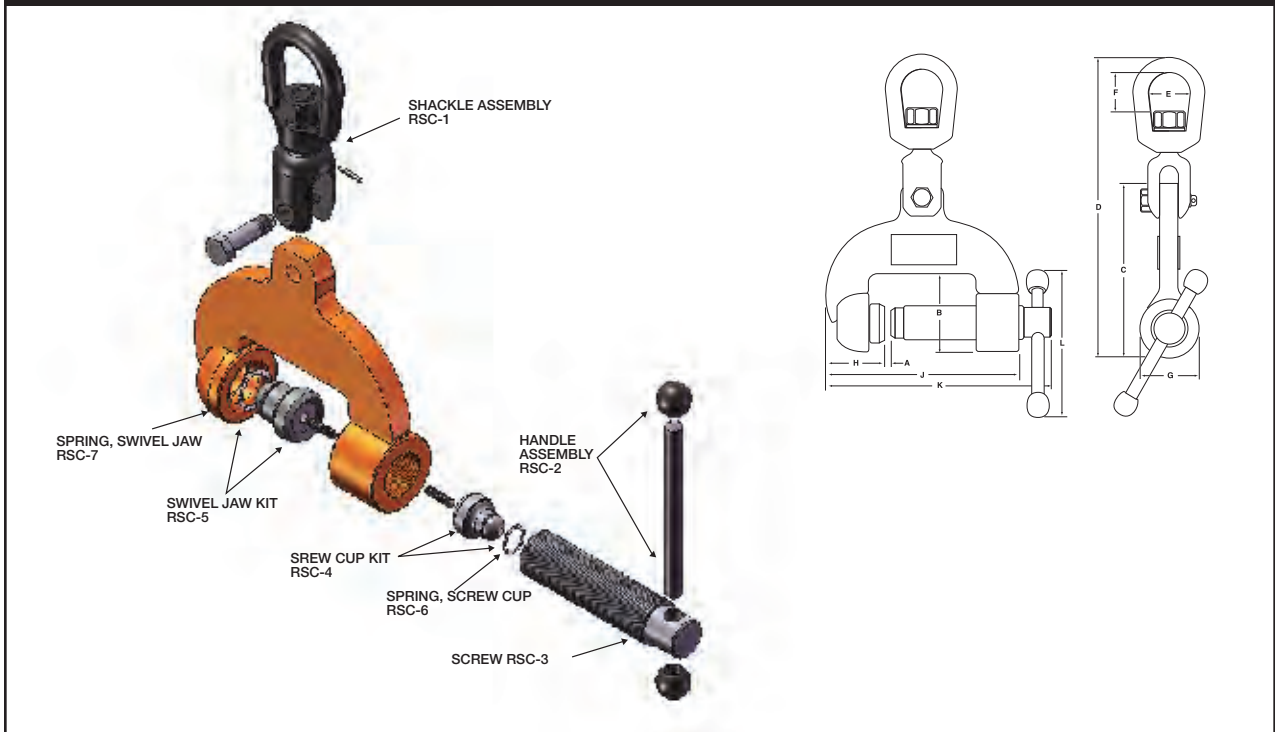

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness A	B	C	D	E	F	G	H	Weight			
									J	K	L (in pounds)	
1/2	0-3	3 ³ / ₁₆	7	12 ³ / ₁₆	1 ¹ / ₄	1 ¹ / ₁₆	2 ³ / ₈	2 ³ / ₈	7 ⁷ / ₈	11 ⁷ / ₈	6 ³ / ₄	13 ¹ / ₂
1/2	1 ¹ / ₈ -4 ¹ / ₄	3 ³ / ₁₆	7 ⁵ / ₁₆	12 ⁵ / ₁₆	1 ¹ / ₄	1 ¹ / ₁₆	2 ³ / ₈	2 ³ / ₈	9 ¹ / ₄	13 ¹ / ₈	6 ³ / ₄	16 ¹ / ₂

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.




Model SCP

Locking, Screw Type

The **Model SCP** clamp is capable of handling steel plate from horizontal to vertical to horizontal through a 180 degree arc and may be used for handling plate at rolling and forming machines. These clamps feature a spring loaded pivoting cam jaw that "cams in" when a load is applied to the lifting shackle. Clamp is capable of handling plate horizontally when used in pairs or sets of pairs, or in a tripod arrangement.

MODEL SCP EXPLODED VIEW

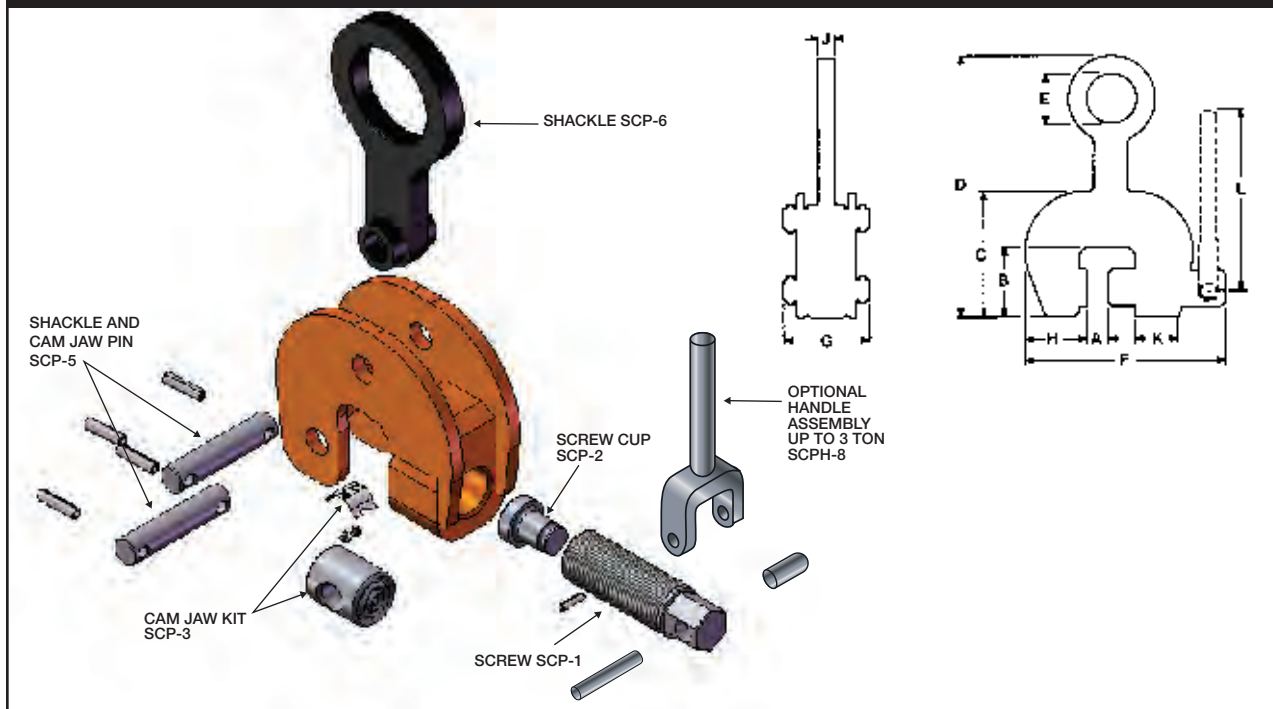

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness		Dimensions											Weight			
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	(in pounds)		
1/2	0-3/4	2 3/8	4 1/2	9	2 3/8	6 5/8	2 3/8	1 7/8	1/2	1 1/2	—	1 3/4	1 3/4	9/16	7		
1 1/2	0-1 1/4	2 7/8	5 1/2	10 9/16	2 5/8	8 7/16	3 3/8	2 3/8	5/8	1 3/4	8 1/4	2	2	1 1/16	13		
3	0-2	3 1/8	5 3/4	12	2 3/8	10 13/16	4 1/16	2 13/16	3/4	2	8 5/8	3	6	3/4	19		
6	0-2 1/2	4 5/16	7 9/16	14 3/8	3	14 3/8	5 3/8	3 7/16	1	2 15/16	—	3 1/2	7	1	44		
10	0-3	5 1/2	9 3/4	19 1/4	3 1/4	16 3/8	6 3/4	4 3/8	1	3 1/8	—	3 1/2	7	1	93		
15	0-4	7 1/4	12 1/8	22 7/8	3 3/4	21 1/2	8 1/4	5 9/16	1 1/4	4	—	3 7/8	8	1 1/4	210		

20, 30, 50, 100 and 150 Ton capacities available upon request. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.




Model SCSL Locking, Screw Type

The **MODEL SCSL** is a locking screw clamp capable of handling a steel plate from horizontal to vertical to horizontal through a 180-degree arc. It is a lightweight clamp primarily used for bench work. It is capable of handling up to a 2,000-pound load. The **MODEL SCSL** incorporates a spring loaded swivel jaw and screw cup. The spring loaded screw cup serves as an indicator when the locking screw has been properly tightened.



MODEL SCSL EXPLODED VIEW

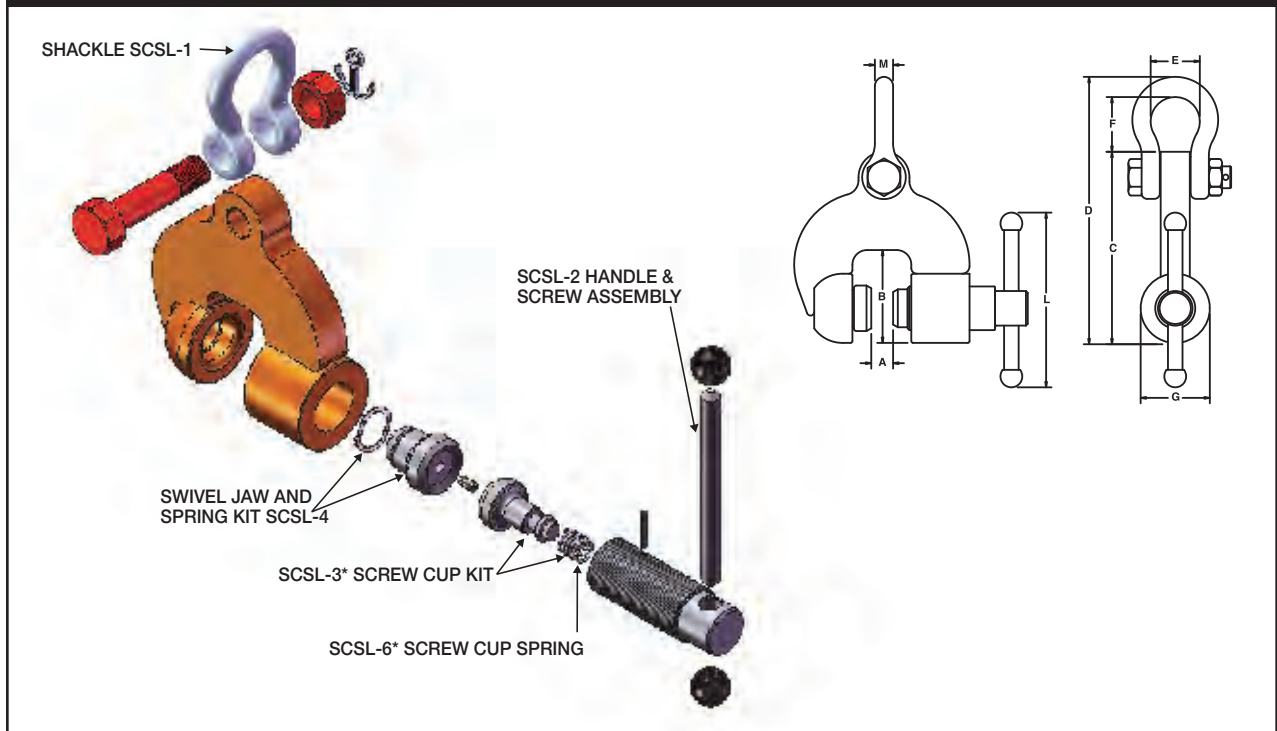

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness A	B	C	D	E	F	G	Weight L	M	(in pounds)
1	0-3/4	3 1/4	6 5/8	9 3/16	1 11/16	1 7/8	2 1/2	6	5/8	12

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.




Model SCSM

Locking, Screw Type

The **MODEL SCSM** is a locking screw clamp capable of handling a steel plate from horizontal to vertical to horizontal through a 180-degree arc. It is a lightweight clamp primarily used for bench work. It is capable of handling up to a 2,000-pound load.

MODEL SCSM EXPLODED VIEW

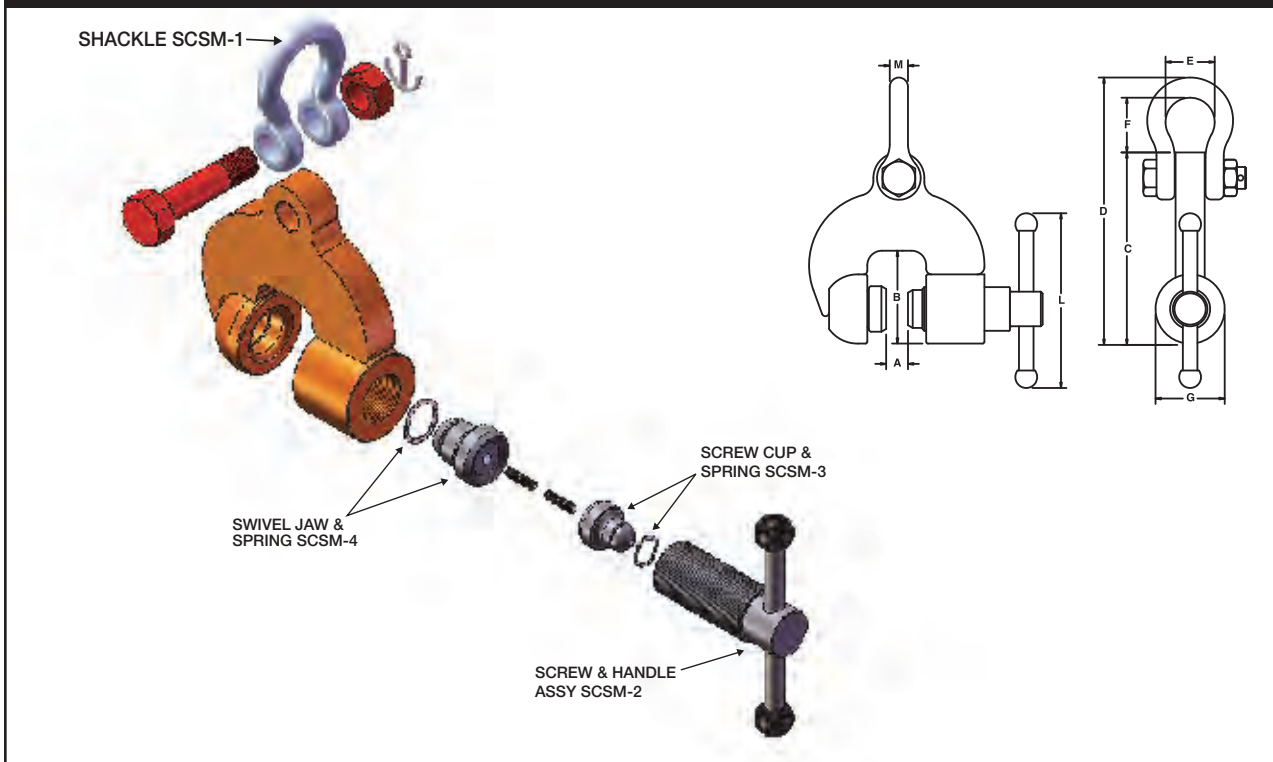

VERTICAL + 180

SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness A	B	C	D	E	F	G	Weight L	M	(in pounds)
1	0- ³ / ₄	3 ¹ / ₄	6 ⁵ / ₁₆	9 ⁹ / ₁₆	1 ¹¹ / ₁₆	1 ⁷ / ₈	2 ¹ / ₂	6	5 ⁵ / ₈	12

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Model TLA

Locking Type

The **Model TLA** is a vertical lifting clamp incorporating a “Lock Open” and a “Lock Closed” feature and an auxiliary push button lock. The clamp is capable of turning a steel plate from horizontal to vertical to horizontal through a 180 degree arc. The “Lock Open,” “Lock Closed” feature facilitates attaching and removing the clamp from the plate.

MODEL TLA EXPLODED VIEW



SPECIFICATIONS (in inches)

Rated Capacity Tons	Plate Thickness A	B	C	MAX. D	E	MAX. F	G	H	J	Weight (in pounds)
1/2	0-3/8	2 3/8	6 1/4	11 1/8	2 3/8	4 3/8	2 3/8	1 13/16	1/2	9
	3/8-1	2 3/8	6 1/4	11 1/8	2 3/8	5 3/8	2 3/8	1 13/16	1/2	10
	1-1 1/4	2 3/8	6 1/4	11 1/8	2 3/8	5 3/8	2 3/8	1 13/16	1/2	11
	1 1/4-1 3/4	2 3/8	6 1/4	11 1/8	2 3/8	5 3/8	2 3/8	1 13/16	1/2	13
1	0-3/4	3	7 1/2	13 1/8	2 5/8	6	2 13/16	2	5/8	14
	3/4-1	3	7 1/2	13 1/8	2 5/8	6 1/8	2 13/16	2	5/8	15
	1-1 1/4	3	7 1/2	13 1/8	2 5/8	6 1/2	2 13/16	2	5/8	16
	1-1 1/2	3	7 1/2	13 1/8	2 5/8	6 3/4	2 13/16	2	5/8	17
	1 1/2-2	3	7 1/2	13 1/8	2 5/8	7 1/4	2 13/16	2	5/8	18
2	0-1	3 1/2	9 3/8	16 1/4	3 3/8	8 3/8	3 3/4	2 7/8	3/4	32
	3/4-1 1/2	3 1/2	9 3/8	16 1/4	3 3/8	9 3/8	3 3/4	2 7/8	3/4	33
	1 1/4-2	3 1/2	9 3/8	16 1/4	3 3/8	9 3/8	3 3/4	2 7/8	3/4	35
	2-2 3/4	3 1/2	9 3/8	16 1/4	3 3/8	10 3/8	3 3/4	2 7/8	3/4	37
4	3/8-1 1/4	4	9 7/8	17 3/8	3 5/8	9	3 13/16	3	3/4	36
	1-2	4	9 7/8	17 3/8	3 5/8	9 3/4	3 13/16	3	3/4	37
	2-3	4	9 7/8	17 3/8	3 5/8	10 3/4	3 13/16	3	3/4	40
	3-4	4	9 7/8	17 3/8	3 5/8	11 3/4	3 13/16	3	3/4	43
6	1/4-1 3/8	4 3/4	11 1/8	20 7/8	3 1/2	10 1/4	3 3/8	3 3/8	3/4	49
	1-2 1/8	4 3/4	11 1/8	20 7/8	3 1/2	11	3 3/8	3 3/8	3/4	51
	2-3 3/8	4 3/4	11 1/8	20 7/8	3 1/2	12	3 3/8	3 3/8	3/4	54
	3-4 1/8	4 3/4	11 1/8	20 7/8	3 1/2	13	3 3/8	3 3/8	3/4	57
8	3/8-1 1/2	4 13/16	12 5/16	21 5/8	3 3/4	11 1/2	4 3/8	3 3/8	1	72
	1-2 1/8	4 13/16	12 5/16	21 5/8	3 3/4	12 1/8	4 3/8	3 3/8	1	74
	2-3 3/8	4 13/16	12 5/16	21 5/8	3 3/4	13 3/8	4 3/8	3 3/8	1	77
	3-4 1/8	4 13/16	12 5/16	21 5/8	3 3/4	14 3/8	4 3/8	3 3/8	1	80
12	1/2-2 1/2	6 1/4	15 1/8	26 3/16	3 7/8	14 1/2	6 3/4	4 3/8	1 3/4	142
	2-4	6 1/4	15 1/8	26 3/16	3 7/8	16	6 3/4	4 3/8	1 3/4	150
	3-5	6 1/4	15 1/8	26 3/16	3 7/8	17	6 3/4	4 3/8	1 3/4	154
	4-6	6 1/4	15 1/8	26 3/16	3 7/8	18	6 3/4	4 3/8	1 3/4	158
20	1/2-3	8 1/8	21 3/4	36 11/16	5	20 11/16	8 1/8	6 3/16	2 3/4	415
	2 1/2-4 1/2	8 1/8	21 3/4	36 11/16	5	22 3/16	8 1/8	6 3/16	2 3/4	426
	3-5	8 1/8	21 3/4	36 11/16	5	22 11/16	8 1/8	6 3/16	2 3/4	430
	5-7	8 1/8	21 3/4	36 11/16	5	24 11/16	8 1/8	6 3/16	2 3/4	445

Consult factory for possible larger capacities. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE